










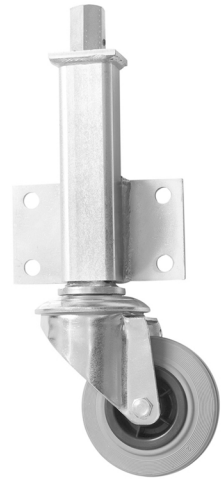









## JA 80mm Medium Duty Jacking Castor Rubber Wheel 70kg Load

### JA4-080-GVR

This medium duty jacking castor with a 80mm rubber wheel can lift loads an additional 76mm in vertical height. With a side mounted attachment plate jacking castors can be used on a variety of equipment and machinery that require vertical movement as well as horizontal. The jacking operation is achieved by a hexagonal spanner at the top of the jacking unit.



### Technical Specifications

|                                                                                   |                                                |                     |
|-----------------------------------------------------------------------------------|------------------------------------------------|---------------------|
|    | Bearing Type                                   | Roller              |
|    | Bolt Hole Size (mm)                            | 10                  |
|  | Colour                                         | No                  |
|                                                                                   | Jacking Unit Extension Height Max 76mm         | 394                 |
|                                                                                   | Jacking Unit Height From Plate Lower Bolt Hole | 187                 |
|  | Load Capacity (kg)                             | 70                  |
|                                                                                   | Max Load Capacity for 2 Jacking Castors        | 70                  |
|                                                                                   | Min Jacking Unit Extension Height              | 318                 |
|                                                                                   | Operating Method                               | 24mm Spanner        |
|  | Plate Dimension Length (mm)                    | 130                 |
|  | Plate Dimension Width (mm)                     | 75                  |
|  | Plate Hole Centres Length (mm)                 | 102                 |
|  | Plate Hole Centres Width (mm)                  | 51                  |
|  | Plate Hole Diameter                            | 11                  |
|  | Product Type                                   | Jacking Castors     |
|  | Swivel Radius                                  | 84                  |
|  | Thread Material                                | No                  |
|  | Total Castor Height                            | 108 + 76            |
|                                                                                   | Total Height to Plate Lower Bolt Hole          | 131                 |
|  | Tread Width (mm)                               | 27                  |
|  | Wheel Centre                                   | Black Polypropylene |
|  | Wheel Colour                                   | Grey                |
|  | Wheel Diameter(mm)                             | 80                  |
|  | Wheel Material                                 | Rubber              |

### Dimensions

